


230m³/h LOW PROFILE HYDRANT DISPENSER

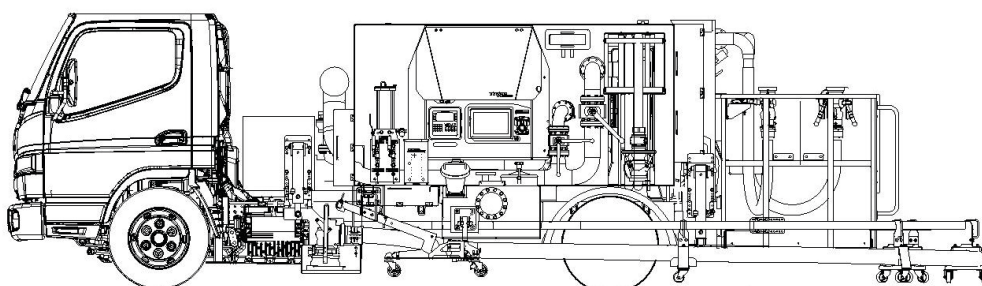

Non contractual picture

| AVIATION FUEL | JET A1 |
|--------------------|---|
| FLOW RATE | 230 m ³ /h – 1 000 USGPM |
| DIMENSIONS (LxWxH) | Approximately 7,5m x 2,9m x 2,1m |
| ERGONOMICS | In conformity with TITAN AVIATION ergonomics charter |
| CONFORMITY | JIG n°12 EN 12312-5 EN 1361-C EI 1529 EI 1581 6th édition EN 1915-1 |
| USE | Exclusively for airport use |
| PAINTING | White RAL 9010 Polyurethane |


CHASSIS

| | |
|----------------|---------------|
| DESIGN | Rigid |
| AXLES LAYOUT | 4 x 2 |
| DRIVING | LHD or RHD |
| ADR HAZMAT | Compliant |
| SPEED GOVERNOR | Up to 25 km/h |

PLATFORM

| | |
|------------|------------------------------|
| PLATFORM | Elevating platform |
| COMPLIANCE | B777-9 - JIG Bulleting n°103 |

DISTRIBUTION

| | |
|---|---|
|  | EZ CONTROL : New generation refuelling interface, robust, intuitive and favoring coordination & safety of operations. More information : www.titan-aviation.com Vehicle equipped with EZ CONTROL ACCESS Pack (see Options section for more packs) |
| UNDERWING LINE | 1 underwing line regulated at 45 PSI - 55m ³ /h - 240 US GPM on hydraulic reel |
| DECK UNDERWING LINE | 2 deck underwing lines - 230m ³ /h - 1 000 US GPM |
| HYDRANT LINE | EZ PIT : Plug/unplug assistant for the 4" hydrant coupling Hydraulically operated hydrant bar equiped with a 3" hose |
| FILTRATION | Stainless steel water separator filter (FWS) |
| METER | Meter with electronic readout |
| 2 ND RÉGULATION | In line pressure control valve inside hydrant coupler |
| SAMPLING | Jar support after filtration & Visual check sampler with recovery tank and pneumatical reinjection pump |
| PIPES | 304 L Stainless steel |
| ANTI-CORROSION PROTECTION | Hot zinc metallized structure Surfaces finishing according to TITAN AVIATION specs |

ALL OUR RANGE VEHICLES ARE EQUIPPED WITH TITAN AVIATION 2.0 FUELLING MODULE, ALSO AVAILABLE INDEPENDENTLY

OPTIONS

SAFETY

| | |
|-----------|--|
| HD230-S03 | Set of 2+1 extinguishers |
| HD230-S04 | Pit flag |
| HD230-S07 | Camera + Screen : mounted at the back (reverse) |
| HD230-S08 | Camera + Screen : mounted on platform (wing view) |
| HD230-S10 | Reflecting stripes |
| HD230-S11 | Bonding reel on opposite side |
| HD230-S12 | Lanyard reel on opposite side |
| HD230-S13 | Access cab handles with colored safety code |
| HD230-S14 | 2 additional wing sensors on platform (4 in total) |
| HD230-S15 | Wheel chock with its support |

OPERATION

| | |
|-----------|--|
| HD230-O03 | Large display |
| HD230-O08 | Customer's logo stickers |
| HD230-O11 | Ladder 3+1 with support (N/A with O12 & O13) |
| HD230-O12 | Ladder 4+1 with support (N/A with O11 & O13) |
| HD230-O13 | Ladder 5+1 with support (N/A with O11 & O12) |

HOMOLOGATION

| | |
|-----------|------------------|
| HD230-H01 | MID homologation |
|-----------|------------------|






COMFORT

| | |
|-----------|---|
| HD230-C02 | Driver seat cover |
| HD230-C03 | Mudflaps on front of mudguards (rear is already included) |
| HD230-C04 | Strap for driver's door opening |
| HD230-C05 | Additional lighting system (draining points) |
| HD230-C08 | Hose spiral protection |
| HD230-C09 | Support inside cab for payment terminal |

QUALITY

| | |
|-----------|---------------------------------------|
| HD230-Q04 | Sample jar cover protection |
| HD230-Q05 | SSAFCON tray |
| HD230-Q06 | Electronic thermometer and densimeter |
| HD230-Q08 | Ticket printer inside cab |

INNOVATION

| | | |
|-----------|---------------------------|---|
| HD230-I02 | EZ Control - Access+ pack |  |
| HD230-I03 | EZ Control - Connect pack |  |
| HD230-I04 | EZ Control - Premium pack |  |
| HD230-I06 | EZ Fuelling Smart |  |
| HD230-I07 | EZ Fuelling Full |  |



www.titan-aviation.com